



New Standard!
General-Purpose
Metal Photoeye

Self-contained
Photoelectric Sensor

PR-G
SERIES

New Standard for
Photoelectric Sensors

03

Value
Priced



01
LR-Z SERIES



02
PR-M/F SERIES



03
PR-G SERIES



Self-contained
Photoelectric Sensor

PR-G SERIES



Revolutionizing general-purpose photoelectric sensors

In industrial automation, the large majority of general-purpose photoelectric sensors are made of plastic. While this design is adequate for certain environments, harsher industrial environments require that these sensors be frequently replaced due to damage. By combining a metal housing with reliable detection capabilities, KEYENCE has developed a durable photoelectric sensor that will provide lasting detection in the harshest of environments.

DURABLE & LONG LIFE

High enclosure rating and Stainless steel body (SUS316L*)

HIGH POWER

Integrated 4-element LED

EASE OF USE

Highly visible indicator and 7-segment display

* See page 11 for details.



DURABLE & LONG LIFE

High enclosure rating and
Stainless steel body (SUS316L*)





KEYENCE requires that all of its photoelectric sensors provide long-term, reliable operation. With a durable stainless steel housing (SUS316L*), the PR-G Series is able to withstand over tightening and impact without the need for additional guarding. The PR-G Series maintains IP68 & IP69K enclosure ratings; while also remaining highly resistant to oils, acids, and alkaline detergents.



Resists damage, even when over-tightened



Meets NEMA Type 4X*, 6P*, 13 and IP68/69K requirements

Downtime as a result of sensor damage, compared to normal operation

Downtime	Cause identification	Sensor replacement	Guarding against recurrence
Normal operation	Periodic inspection	Significant reduction	

By eliminating downtime due to sensor damage, the amount of normal operation time is greatly increased

* See page 11 for details.

HIGH POWER

Integrated 4-element LED

The integration of a high luminance 4-element LED with an increase in the gain of the received light intensity, has enabled the PR-G Series thru-beam model to achieve a maximum detecting distance of 30 meters **98.4'**. These two factors allow the PR-G Series to reliably detect through oil, dust, and other forms of build-up. This high power ensures the stable operation of the PR-G Series in harsh environments.

30 m 98.4'
max.



EASE OF USE

Highly visible indicator and 7-segment display

The large output indicator is clearly visible from any position and is approximately six times larger than that of a conventional KEYENCE sensor. The PR-G Series also offers an easy to adjust trimmer for simplistic sensitivity setting (no special tools required). Along with this, the reflective and retro-reflective models contain a 7-segment digital display, which enables accurate calibration based on numerical values.





Highly visible indicator (Approx. 6 times larger than conventional KEYENCE models)



Easily adjust sensitivity while monitoring numeric values

■ Lineup

Configuration	Type	Detecting distance	Connection Method	Output	Model	Weight
Thrubeam 	 M18 threaded mount w/ M12 connector		M12 4-pin ^{*1}	Bipolar (NPN + PNP)	PR-G51CBD	Approx. 85 g
	 Rectangular w/ 2 m 6.6' cable		NPN	PR-G51N	Approx. 160 g	
			PNP	PR-G51P		
	 Rectangular w/ M8 connector		NPN	PR-G51CN	Approx. 55 g	
			M8 3-pin ^{*1}	PNP		PR-G51CP
	PR-G51C3PD					
Retro-reflective ^{*2} 	 M18 threaded mount w/ M12 connector		M12 4-pin ^{*1}	Bipolar (NPN + PNP)	PR-G61CBD	Approx. 45 g
	 Rectangular w/ 2 m 6.6' cable		NPN	PR-G61N	Approx. 75 g	
			PNP	PR-G61P		
	 Rectangular w/ M8 connector		PNP	PR-G61CP	Approx. 25 g	
				PR-G61C3PD		
	Reflective 		 M18 threaded mount w/ M12 connector		M12 4-pin ^{*1}	Bipolar (NPN + PNP)
 Rectangular w/ 2 m 6.6' cable		NPN	PR-G41N		Approx. 75 g	
 Rectangular w/ M8 connector		M8 4-pin ^{*1}	PNP		PR-G41CP	Approx. 25 g

*1 Cable sold separately.

*2 Reflector sold separately. Reflectors and corresponding detecting distances can be found on page 9.

■ Mounting bracket

Type		Model	Material/Weight
	Standard mounting bracket for rectangular type (M3 screw x 2 supplied)	OP-87408 ^{*1,2}	SUS316L Approx. 30 g
	Rear mounting bracket for rectangular type (M3 screw x 2 supplied)	OP-87409 ^{*2}	SUS316L Approx. 30 g
	Robust mounting bracket for rectangular type (t = 3 0.12") (M3 screw x 2 supplied)	OP-87410 ^{*2,3}	SUS316L Approx. 170 g
	Adjustable bracket for rectangular type (M3 screw x 2 supplied)	OP-87404	Zinc nickel plating and others Approx. 95 g
	Adjustable bracket for threaded mount type	OP-87405	Zinc nickel plating and others Approx. 100 g
 Screw length Adjustable bracket fixing screw	Screw length: 45 mm 1.77"	OP-87406	Steel nickel plating Approx. 70 g
	Screw length: 65 mm 2.56"	OP-87407	Steel nickel plating Approx. 80 g
	Extendable bracket for rectangular type	OP-87664	Zinc nickel plating and others Approx. 190 g
	200 mm 7.87"	OP-87665 ^{*2}	SUS304 Approx. 77 g
	130 mm 5.12"	OP-87666 ^{*2}	SUS304 Approx. 50 g
	M18 nut	OP-3052 ^{*4}	Brass nickel plating Approx. 10 g
	M18 Lock washer	OP-2263 ^{*4}	Material: Steel Surface treatment: Trivalent chromium plating Approx. 5 g

*1 This bracket is dedicated to the cable type sensors.

Use OP-87409 or OP-87410 when using the connector type sensors.

*2 These brackets are only meant for use with the rectangular type sensors.

*3 When installing a connector type sensor in this bracket, an L-shaped connector cable must be used.

*4 Supplied with M18 threaded mount type.

■ Reflector

Type	Model	Detecting distance	Reflective Area	Temperature specification	Material/Weight
 Reflective mirror R-2L	OP-84219	0.1 to 4.2 m 0.3' to 13.8'	47 x 47 mm 1.85" x 1.85"	-20 to +50°C -4 to 122°F	Reflector: Acrylic Base: ABS Approx. 20 g
 Reflective mirror R-3	OP-96436	0.1 to 2.9 m 0.3' to 9.5'	31 x 31 mm 1.22" x 1.22"		Reflector: Acrylic Base: ABS Approx. 10 g
 Reflective mirror R-5	R-5	0.1 to 2.5 m 0.3' to 8.2'	34 x 11.6 mm 1.34" x 0.46"		Reflector: Acrylic Base: ABS Approx. 5 g
 Reflective tape	OP-84221	0.2 to 1.1 m 0.7' to 3.6'	30 x 40 mm 1.18" x 1.57"		Surface: Acrylic Cube: Polycarbonate Approx. 1 g
 Oil/Chemical-resistant reflector	OP-87623	0.1 to 2.4 m 0.3' to 7.9'	51 x 51 mm 2.01" x 2.01"	-20 to +70°C -4 to 158°F	Oil/Chemical-resistant resin Approx. 20 g
 Round reflector	OP-87624	0.1 to 3 m 0.3' to 9.8'	ø80 ø3.15" exclude ø10.5 ø0.41" in the middle	-20 to +50°C -4 to 122°F	Reflector: Acrylic Base: ABS 35 g

OP-87407 + 87664 + 87666



Extendable bracket for rectangular type

OP-87406 + 87404




Adjustable bracket for rectangular type

OP-87406 + 87405




Adjustable bracket for threaded mount type

■ Cable


Specifications	Material	Appearance	Connection Method	Length	Model	Weight
Standard	Cable: PVC Connector: Zinc nickel plating	 Straight type	M12 4-pin	2 m 6.6'	OP-87634	Approx. 100 g
				10 m 32.8'	OP-87635	Approx. 430 g
			M8 4-pin	2 m 6.6'	OP-87625	Approx. 75 g
				10 m 32.8'	OP-87626	Approx. 340 g
Oil-resistant	Cable: PUR Connector: Zinc nickel plating		M8 3-pin	2 m 6.6'	OP-87627	Approx. 80 g
				M12 4-pin	2 m 6.6'	OP-87636
			10 m 32.8'		OP-87637	Approx. 330 g
			M8 4-pin	2 m 6.6'	OP-87628	Approx. 55 g
10 m 32.8'	OP-87629	Approx. 260 g				
Chemical-resistant	Cable: PVC Connector: SUS316L	M8 4-pin	2 m 6.6'	OP-87621	Approx. 75 g	
		M8 3-pin	2 m 6.6'	OP-87622	Approx. 65 g	
Standard	Cable: PVC Connector: Zinc nickel plating	 L-shaped type	M12 4-pin	2 m 6.6'	OP-87638	Approx. 100 g
				10 m 32.8'	OP-87639	Approx. 430 g
			M8 4-pin	2 m 6.6'	OP-87630	Approx. 75 g
				M8 3-pin	2 m 6.6'	OP-87631
Oil-resistant	Cable: PUR Connector: Zinc nickel plating		M12 4-pin		2 m 6.6'	OP-87640
				10 m 32.8'	OP-87641	Approx. 330 g
			M8 4-pin	2 m 6.6'	OP-87632	Approx. 55 g
				10 m 32.8'	OP-87633	Approx. 260 g
Chemical-resistant	Cable: PVC Connector: SUS316L	M8 4-pin	2 m 6.6'	OP-87619	Approx. 70 g	
		M8 3-pin	2 m 6.6'	OP-87620	Approx. 60 g	

■ I/O circuit diagram

NPN



PNP




M8 connector (4-pin) type




M8 connector (3-pin) type



Bipolar



Thrubeam transmitter



M12 connector (4-pin) type



■ Enclosure ratings

Enclosure rating	Connector type			Cable type
	Standard	Oil-resistant	Chemical-resistant	
IP67 IEC60529	✓	✓	✓	✓
IP68 IEC60529	—	✓	✓	✓
IP69K DIN40050-9	—	✓ ^{*1}	✓	✓
ECOLAB, Diversey	—	—	✓ ^{*2}	✓ ^{*2}

*1 Only the M12 connector type satisfies this specification.
*2 Tested for endurance against cleaners of several companies.

■ Specifications



Type				Thrubeam	Retro-reflective	Diffuse reflective
Model	Threaded mount type	NPN + PNP (Bipolar)	M12 connector, 4-pin	PR-G51CBD	PR-G61CBD	PR-G41CBL
	Rectangular type	NPN	2 m 6.6' cable	PR-G51N	PR-G61N	PR-G41N
			M8 connector, 4-pin	PR-G51CN	—	—
		PNP	2 m 6.6' cable	PR-G51P	PR-G61P	—
			M8 connector, 4-pin	PR-G51CP	PR-G61CP	PR-G41CP
		M8 connector, 3-pin	PR-G51C3PD	PR-G61C3PD	—	
Detecting distance				30 m 98.4'	0.1 to 4.2 m 0.3' to 13.8'	500 mm 19.69"
No. of control outputs				2 (Dark-ON + Light-ON)*1		
Output operation	Output 1			Dark-ON		Light-ON
	Output 2*2			Light-ON		Dark-ON
Response time				1 ms	0.5 ms	
Sensitivity adjustment				One-turn trimmer (230°)		Five-turn trimmer
Spot diameter				—		ø20 mm ø0.79" max. (at 300 mm 11.81")
Light source				4 elements, Red LED (631 nm)	4 elements, Red LED (630 nm)	4 elements, Point light source red LED (650 nm)
Mutual interference prevention				— 2 units		
Indicators				Transmitter: Power indicator (green) Receiver: Output indicator (yellow), Stable operation indicator (green)		7-segment display (0 to 999), Output indicator (yellow)
Power voltage				10 to 30 VDC, including 10% ripple (P-P)		
Power consumption				Transmitter: 450 mW max. (15 mA max. at 24 V, 15 mA max. at 12 V) Receiver: 360 mW max. (12 mA max. at 24 V, 15 mA max. at 12 V)		450 mW max. (15 mA max. at 24 V, 21 mA max. at 12 V)
Control output				NPN output type: NPN open collector, PNP output type: PNP open collector, Bipolar output type: NPN + PNP open collector 30 VDC or less, 100 mA or less Residual voltage: 1.2 V or less at less than 10 mA, 2 V or less at 10 to 100 mA		
Emission stop input				Non-voltage input Input time ON: 1 ms or more, OFF: 20 ms or more		—
Protection circuit				Protection against reverse power connection, power supply surge, output overcurrent, output surge, and reverse output connection		
Environmental resistance	Enclosure rating*3			IP68 (IEC60529), IP69K (DIN40050-9), Rectangular type: 4X, 6P, 13 (NEMA250), Threaded mount type: 4, 6, 13 (NEMA250)		
	Ambient light			Incandescent lamp: 5000 lux or less, Sunlight: 20000 lux or less		
	Ambient temperature			-20 to +70°C -4 to 158°F (No freezing)*4		
	Storage temperature			-20 to +70°C -4 to 158°F		
	Ambient humidity			35 to 85% RH (No condensation)		
	Shock resistance			1000 m 3280.8/s² in X, Y, and Z directions, 6 times respectively		
	Vibration resistance			10 to 55 Hz, 1.5 mm 0.06" double amplitude in X, Y, and Z directions, 2 hours respectively		
	Insulating resistance			20 MΩ or more (500 VDC)		
Withstand voltage			1000 VAC, 50/60 Hz, 1 min			
Material				Case: Rectangular type: SUS316L, Threaded mount type: Zinc die cast (Nickel chrome plating), Indicator cover: PES, 7-segment display cover/Lens cover: PMMA (scratch-resistant coating) M18 nut: Brass (Nickel plating), Lock washer: Steel (Chrome plating)		
Weight	M12 connector			Approx. 85 g	Approx. 45 g	
	2 m 6.6' cable			Approx. 160 g	Approx. 75 g	
	M8 connector			Approx. 55 g	Approx. 25 g	
Accompanying items				Instruction Manual, (Threaded mount type only) M18 nut, Lock washer		

*1 For the threaded mount type sensors, the outputs are 1 NPN output and 1 PNP output.


*2 Output 2 is not available on the threaded mount type or M8 3-pin type.

*3 For the connector type, the enclosure rating varies depending on the cable that is used.


*4 When the ambient temperature is 60°C 140°F or higher, the device should be powered with no more than 24 VDC and 50 mA.

■ Dimensions


PR-G51CBD

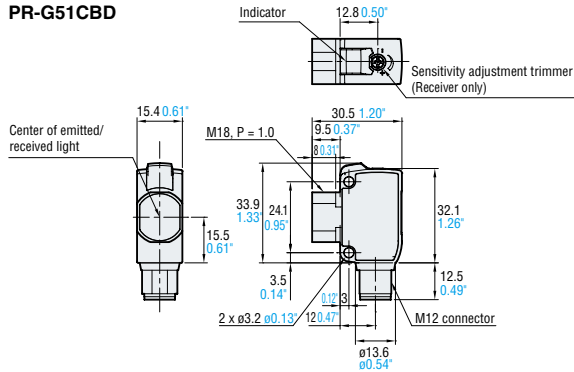


PR-G41CBL/G61CBD

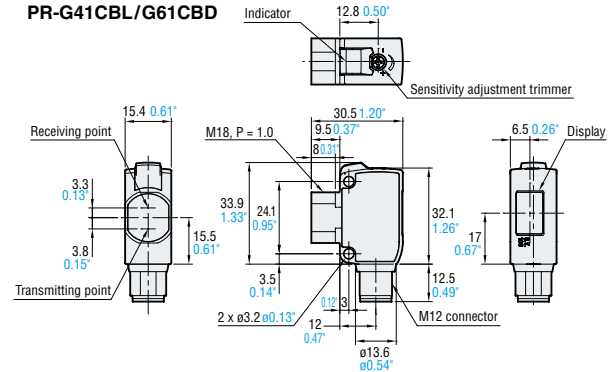


PR-G51N/G51P

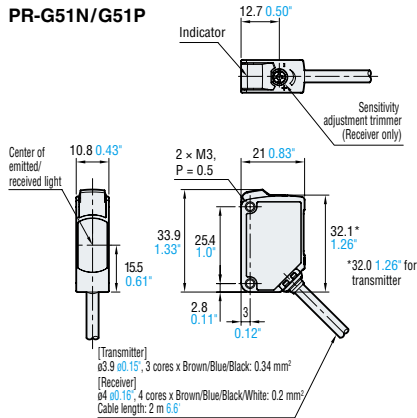


PR-G51CN/ G51CP/ G51C3PD

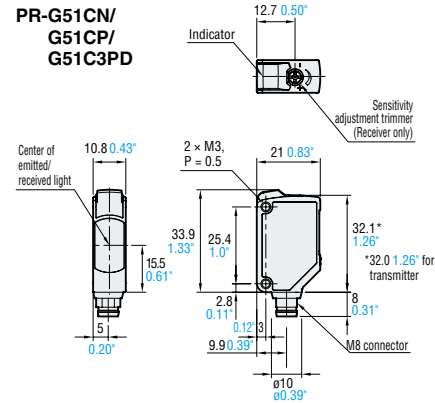


PR-G41N/G61N/ G61P

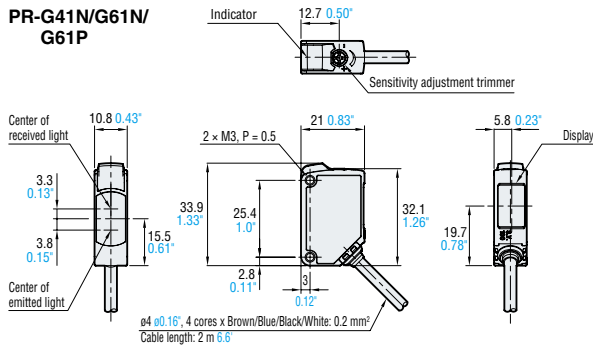


PR-G41CP/G61CP/ G61C3PD

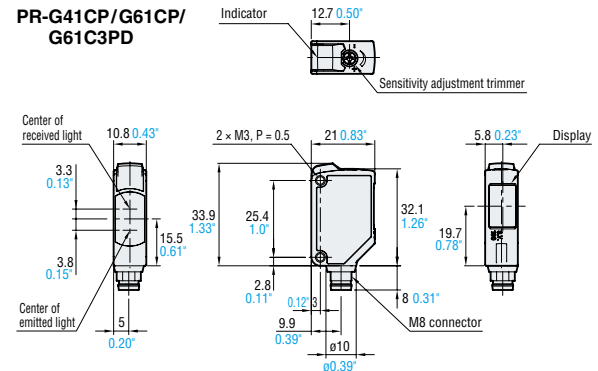


OP-87408





OP-87409




OP-87410

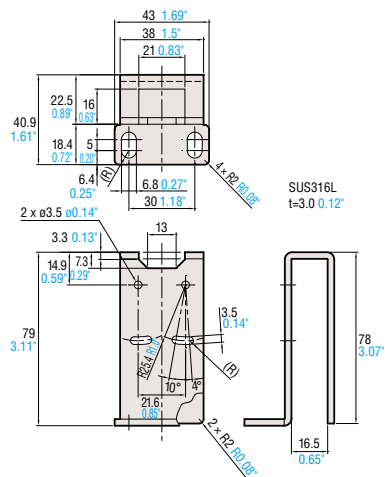


OP-87404

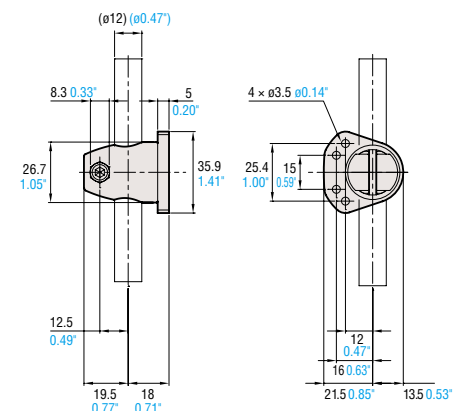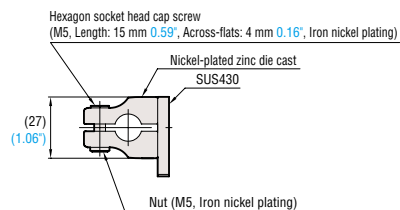

OP-87406/87407

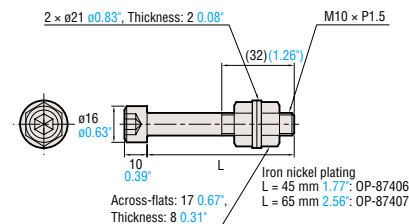


OP-87406 (87407) + OP-87404

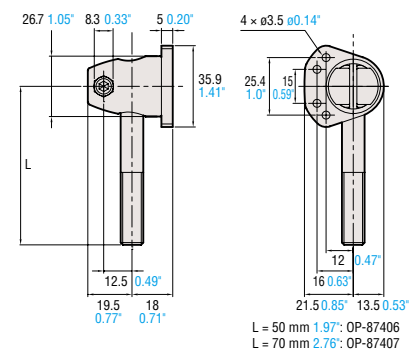


L = 50 mm 1.97": OP-87406
L = 70 mm 2.76": OP-87407

OP-87664


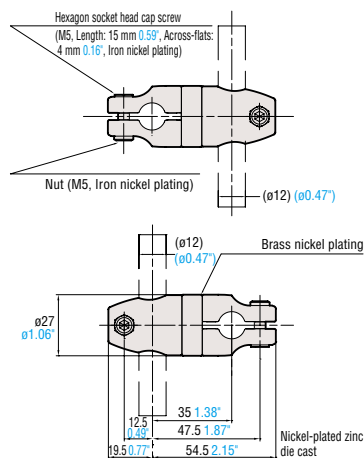


OP-87665/87666

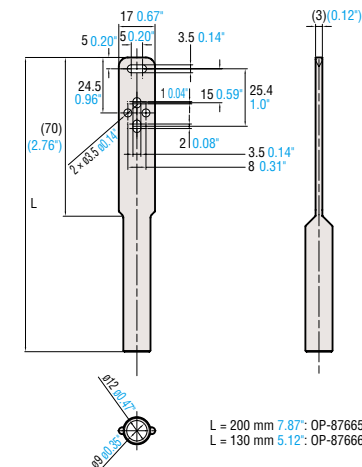


L = 200 mm 7.87": OP-87665
L = 130 mm 5.12": OP-87666


OP-87405

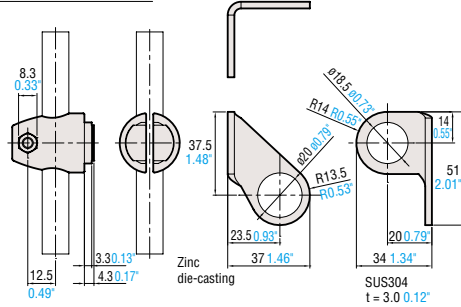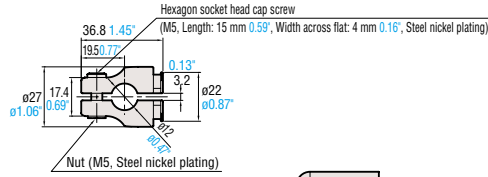


OP-3052




OP-2263




OP-87634/87635




OP-87636/87637




OP-84219 (R-2L)




OP-96436 (R-3)




R-5




OP-84221 (Reflective tape)




OP-87623




OP-87624




OP-87638/87639

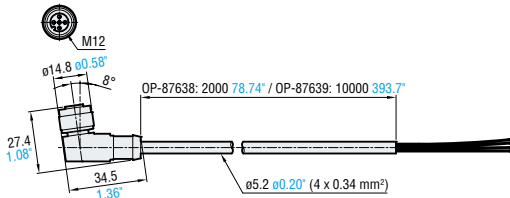


OP-87640/87641

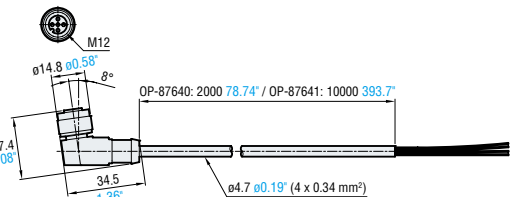


OP-87625/87626




OP-87628/87629




OP-87621




OP-87627




OP-87622




OP-87630

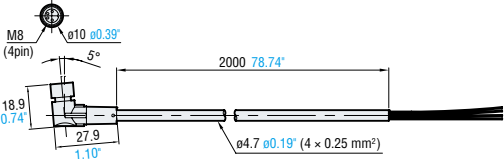


OP-87632/87633

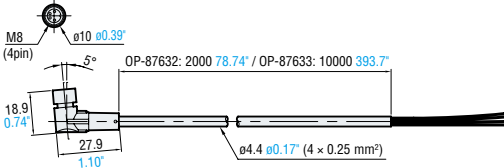


OP-87619

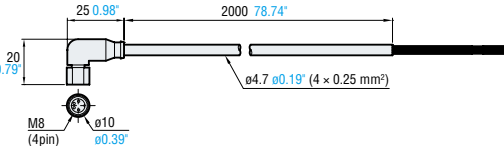

OP-87631

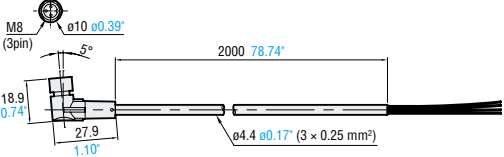

OP-87620

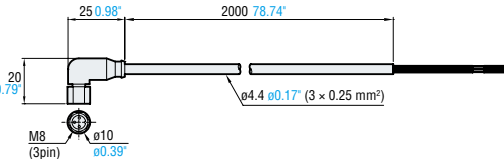

M12 connector
(4-pin)
type



M8 connector
(4-pin)
type



M8 connector
(3-pin)
type



No.	Color
①	Brown
②	White
③	Blue
④	Black

CAD DATA DOWNLOAD
www.keyence.ca/CADG



PZ-G/V SERIES

00



LR-Z SERIES

01



PR-M/F SERIES

02



PR-G SERIES

03



TO CONTACT YOUR LOCAL OFFICE
1-888-KEYENCE
1 - 8 8 8 - 5 3 9 - 3 6 2 3

www.keyence.ca
E-mail : keyencecanada@keyence.com



SAFETY INFORMATION

Please read the instruction manual carefully in order to safely operate any KEYENCE product.

CONTACT YOUR NEAREST OFFICE FOR RELEASE STATUS

KEYENCE CANADA INC. **Head Office** 6775 Financial Drive, Suite 202, Mississauga, ON L5N 0A4, Canada **PHONE:** +1-905-366-7655 **FAX:** +1-905-366-1122
Montreal Office **PHONE:** +1-514-694-4740 **FAX:** +1-514-694-3206 **Windsor Office** **PHONE:** +1-905-366-7655 **FAX:** +1-905-366-1122

The information in this publication is based on KEYENCE's internal research/evaluation at the time of release and is subject to change without notice. Company and product names mentioned in this catalog are either trademarks or registered trademarks of their respective companies. The specifications are expressed in metric units. The English units have been converted from the original metric units.
Copyright © 2013 KEYENCE CORPORATION. All rights reserved.

KCN1-1017

PRG-KCN-C-US 1108-3 612019