



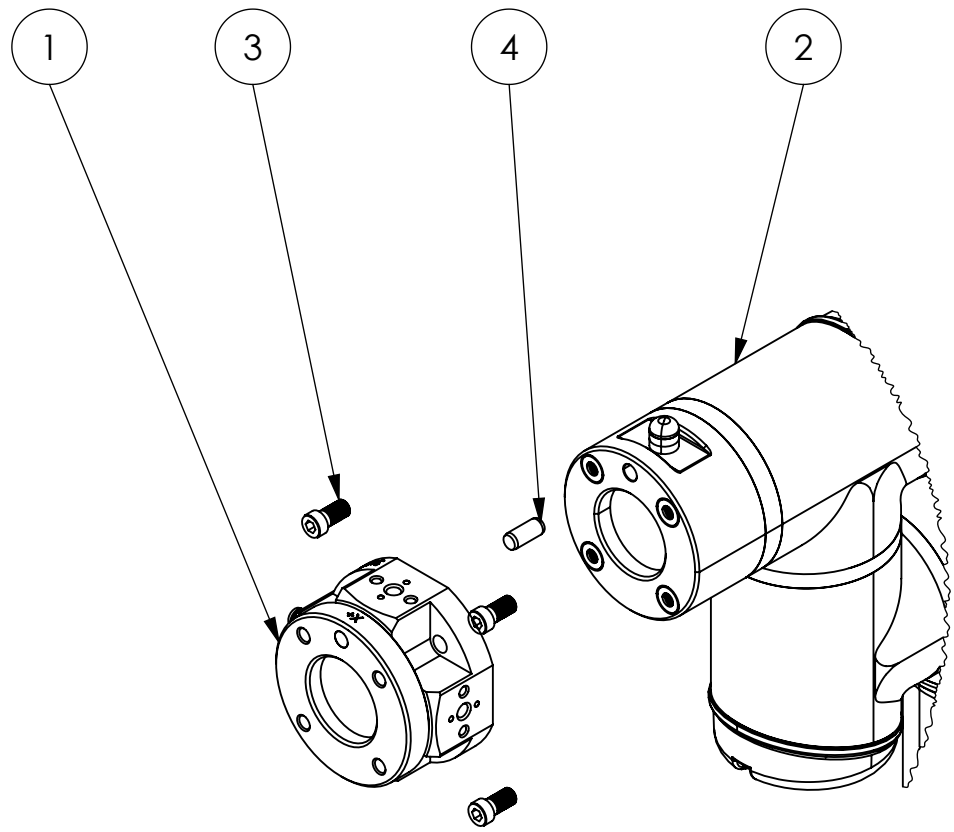

DETAILA (2 : 5)

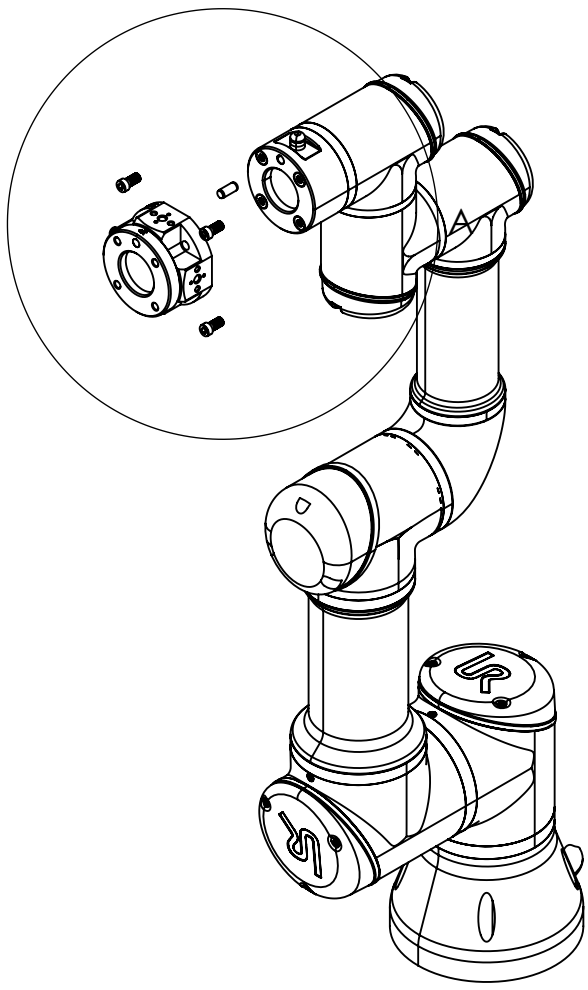

ITEM NO.	NUMBER	DESCRIPTION	QTY.
1	BFT-SENS-ECAT-M8	SensONE 6-axis F/T sensor with EtherCAT interface	1
2	UR3	UR3 industrial robot arm	1
3	CSHSMT-ST-M6x12-12	Hexagon socket extra low small head cap screw CSHSMT-ST - M6 x 12	4
4			1

- NOTES
- SHIFT IN Z-AXIS AFTER SENSOR MOUNTING IS 35 MILLIMETERS.

		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE Ra: 1.6 GENERAL TOLERANCES: DIN ISO 2768 (fH) BREAK SHARP EDGES		FINISH:			
			NAME	DATE	MODEL DESCRIPTION		
		DRAWN	EE	16/06/2023	SensONE kit for UR3		
Hagenholzstrasse 85, 8050, Zurich, Switzerland Email: info@botasys.com Website: www.botasys.com ©2022 BOTA Systems AG. All rights reserved.		CHECKED	EE	21/06/2023	MODEL NUMBER	DRAWING NUMBER	MODEL REVISION
		APPROVED	EE	21/06/2023	SEN-ROB-KIN		A
WEIGHT	14033.66 grams	MATERIAL			SCALE: 1:10	PAGE: 1 / 1	A3